


DISCONNECTED IMPERVIOUS SURFACES
PLAN VIEW
NTS

FOR USE WITHIN WASHINGTON COUNTY UTAH

NOTES:

- a. ALTERNATIVE APPROACH MEATHODS MUST COMPLY WITH GUIDANCE AND LID MATRIX IN ADDITION TO LOCAL AND STATE CRITERIA. THESE TEMPLATES ARE INTENDED TO REPRESENT TYPICAL DETAILS. EACH DETAIL WILL REQUIRE REVISIONS TO MEET SPECIFIC SITE CONFIGURATIONS AND CONSTRAINTS BEFORE INCORPORATION INTO DESIGN PLANS.
- b. EXTEND RAIN GUTTER OUTLET AND/OR FLOW SPREADER THE MINIMUM DISTANCE FROM THE BUILDING FOOTING AS CALLED FOR BY THE GEOTECHNICAL ENGINEER
- c. 600 SQUARE FOOT ROOF AREA MAX PER EACH RAIN GUTTER DOWN SPOT

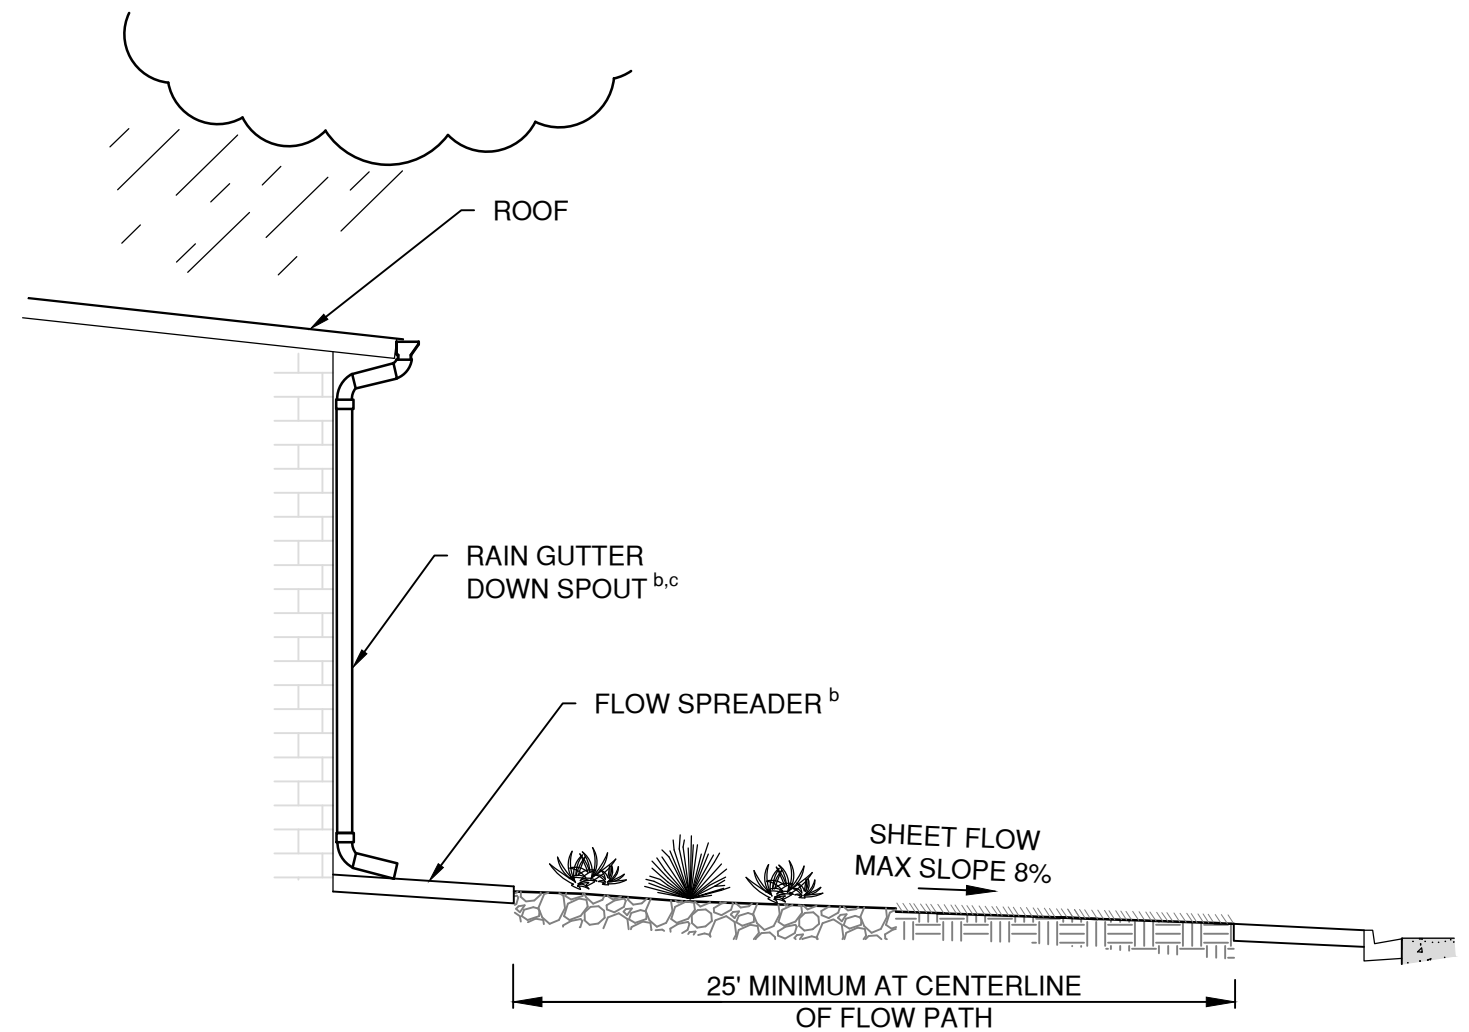

DISCONNECTED IMPERVIOUS SURFACES
PROFILE A-A
NTS



POSSIBLE ALTERNATIVE APPROCH - DESIGN TEMPLATE

APPROVED BY:
DSWC

DATE:
07/28/2020

DISCONNECTED IMPERVIOUS SURFACES

STANDARD DETAIL NO.

DI-1